




Datavideo CAP-4 4K HDMI 轉 USB-C 擷取盒

Datavideo CAP-4 是一款高效能 4K HDMI 擷取裝置，專為專業影像製作、直播與內容創作而設計。支援 4K 2160p 50/60fps，畫質清晰細膩。搭載 USB-C 3.2 Gen 2 高速傳輸介面，提供跨作業系統的即插即用便利性。具備多樣化音訊混合功能，能無縫整合 HDMI 內嵌音訊與外接 Line-In 音源。輕巧有力且操作簡單，CAP-4 是快速擷取高品質影像的理想選擇。



USB-C 3.2 Gen 2 介面

CAP-4 配備高速 USB-C 3.2 Gen 2 介面，資料傳輸速度可達 10Gbps。體驗流暢連線與閃電般快速的資料傳輸效能。

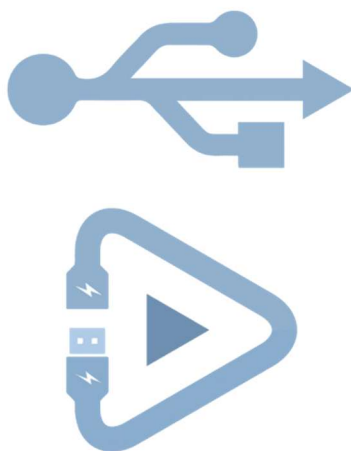


即插即用

享受 CAP-4 隨插即用功能帶來的輕鬆安裝體驗。無論您是專業人士還是新手創作者，都能在各種作業系統上立即開始使用。

相容多種作業系統

- Windows: AMcap, Google Meet, OBS (Open Broadcast Software), TeamViewer, Xsplit Broadcaster, Zoom.us, Potplayer
- Linux: VLC, OBS
- MAC OS: OBS, VLC

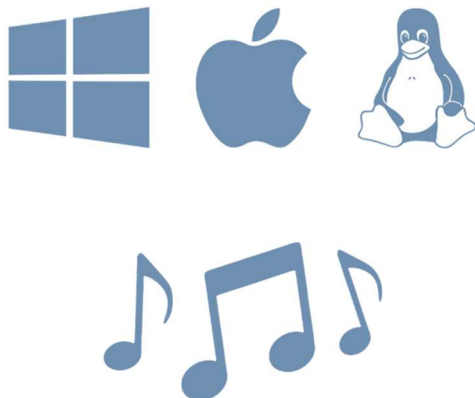

外接立體聲音輸入

透過將 Line-In 外接聲音與 HDMI 內嵌聲音無縫混音，提升您影像的音質。不論是錄製現場活動、遊戲實況，還是專業簡報，CAP-4 都能協助您為觀眾打造細膩且沉浸式的聲音體驗。

規格

輸入：1x HDMI

輸出：1x USB 3.2 Gen (Type-C)，1x HDMI Loop through

輸入影像帶寬：Up to FRL 6 (48G)

輸出影像帶寬：USB-C: Up to 10 Gbps，HDMI: Up to FRL 6 (48G)

輸入影像格式：3840 x 2160p: 60/59.94/50/30/29.97/25

2560 x 1440p: 60/59.94/50/30/29.97/25

1920 x 1080p: 120

1920 x 1080p: 60/59.94/50/30/29.97/25

1280 x 720p: 60/59.94/50

輸出影像格式：USB-C:

3840 x 2160p: 60/59.94/50/30/29.97/25

2560 x 1440p: 60/59.94/50/30/29.97/25

1920 x 1080p: 120

1920 x 1080p: 60/59.94/50/30/29.97/25

1280 x 720p: 60/59.94/50/30/29.97/25

HDMI:

3840 x 2160p: 60/59.94/50/30/29.97/25

2560 x 1440p: 60/59.94/50/30/29.97/25

1920 x 1080p: 120

1920 x 1080p: 60/59.94/50/30/29.97/25

1280 x 720p: 60/59.94/50

聲音輸入：HDMI Embedded Audio (2-channel) , 3.5mm stereo Line input

聲音格式：Input:

- 16/24 bits, 2-Channels,
- 44.1KHz and 48KHz sample rate

Output:

- up to 24-bit PCM, fixed 48KHz output

擷取影像格式：RGB/YUY2/NV12/I420/P010/MJPEG (USB 3.2 Gen 2)

MJPEG/YUY2/NV12/I420/ (USB2.0)

韌體升級：Via USB Port

軟體兼容性：•Windows: AMcap, Google Meet, OBS (Open Broadcast Software), TeamViewer, Xsplit
Broadcaster, Zoom.us, Potplayer

•Linux: VLC, OBS

•MAC OS: OBS, VLC

支援 OS：•Windows 10 x64 or above

•MacOS High Sierra 10.13 or above

•Linux OS

電源提供：Via USB Port

電源：Under 4.5W

工作溫度：0~40°C

儲存溫度：-20~60°C

濕度：20~90% RH (no condensation)

最低系統要求：•PC or Notebook Basic Interface Requirements (Recommanded):

USB 3.2 Gen 2x1 Type C or Type A; HDMI 2.0

• Windows Operating System: Windows® 10 x64 or above

1. USB must support UVC protocol, meet 4Kp30 protocol requirements;

HDMI must support 4Kp60 HDR

2. Intel® Core™ i3-8XXX or above

3. NVIDIA® GeForce® GTX 1060 or above

4. 16 GB RAM (*dual-channel)

• Mac Operating System: MacOS High Sierra 10.13 or above

1. USB must support UVC protocol, meet 4Kp30
protocol requirements; HDMI must support 4Kp60 HDR

2. iMac:

a) 3.6GHz Quad-Core Intel Core i7

b) Radeon Pro 555 (2GB of VRAM)

c) 16GB 2400MHz DDR4 Memory

3. MacBook Pro:

a) 2.8GHz Quad-Core Intel Core i7

b) Radeon Pro 555X (2GB GDDR5 Memory)

c) 16GB 2400MHz DDR4 Memory

尺寸(LxDxH)：105 x 68 x 23 mm

重量：75g

器材明細：

1 x CAP-4

1 x USB 3.0 Cable